

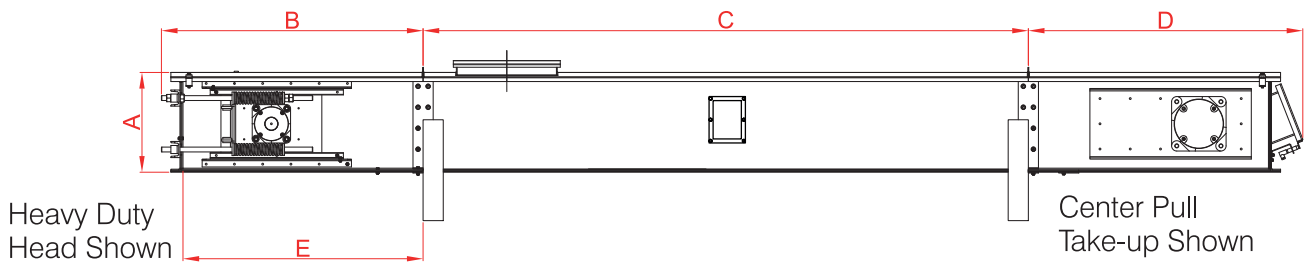



APPLICATIONS

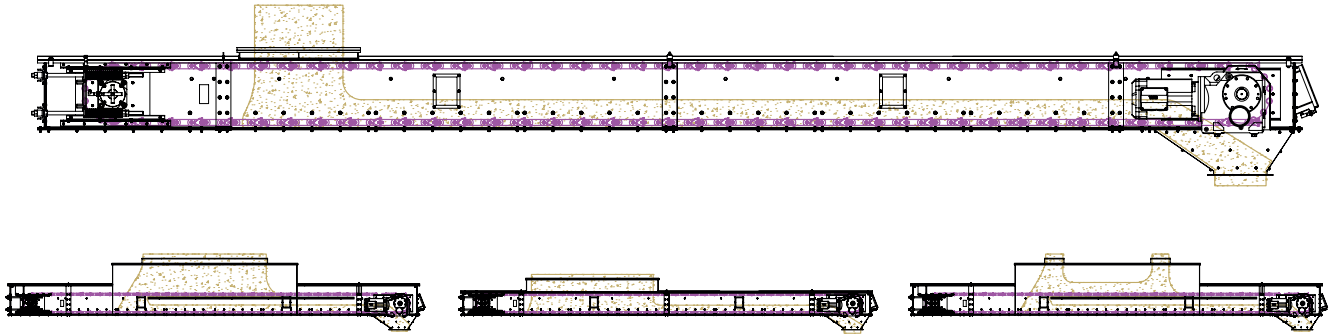


52



DIVIDED FLOW INLET



HEAD SECTION

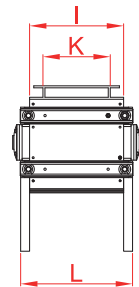

TAIL SECTION

TEKNİK BİLGİLER - TECHNICAL DATA

Tip / Type	Kapasite Capacity t/h	Zincir Hızı Chain Speed m/s	A	B	C	D	E	F	G	H	I	J	K	L
MS-23-228x305	70	0,66	330	1200	3000	1200	952	584	584	320	330	228	228	370
MS-23-330x305	100	0,66	330	1200	3000	1200	952	686	584	420	430	330	330	470
MS-23-360x460	170	0,66	500	1200	3000	1200	952	686	711	447	457	360	360	500
MS-23-432x460	220	0,66	500	1200	3000	1200	952	787	711	520	530	432	432	572
MS-23-533x460	270	0,66	500	1200	3000	1200	952	889	711	620	630	533	533	673
MS-23-635x460	320	0,66	500	1200	3000	1200	952	991	711	735	745	635	635	775
MS-23-762x460	390	0,66	500	1200	3000	1200	952	711	711	860	870	762	762	978
MS-23-635x660	500	0,66	600	1200	3000	1200	952	1168	1016	735	745	635	635	851
MS-23-762x660	610	0,66	690	1200	3000	1200	952	1295	1016	860	870	762	762	978
MS-23-635x838	680	0,66	910	1300	3000	1300	1143	1168	1321	735	745	635	635	851
MS-23-762x838	850	0,66	910	1300	3000	1300	1143	1295	1321	860	870	762	762	978
MS-23-1100x1100	1200	0,66	1200	1300	3000	1300	1200	1560	1674	1200	1210	1100	1100	1420

* The above capacities are rated under ideal conditions with dry material being properly fed into the conveyor and horizontal usage. Bulk weight : 0.75 t/m³

ZİNCİRLİ GÖTÜRÜCÜ / CHAIN CONVEYOR / TRANSPORTEUR A CHAÎNE

